



Produktfakta Modell Windy:

- Generellt:** Öppningsbara fönsterpartier i sträckt Pvc-väv.
Bredd: 150-500 cm beroende på modell.
Höjd: Från 150-300 cm beroende på modell.
Färgval aluminiumprofiler: Standardfärg – antracitgrå, rostbrun, beige eller vit. Ytterligare RAL-färger finns som tillval.
Material Pvc-väv: **Preconstraint # 302** (480 g/kvm) - vit eller beige. Ytterligare ett tjugotal färger finns som tillval på # 302. **Preconstraint # 602 blackout** (730 g/kvm) - vit eller beige. **Cristal Plus** - helt genomskinlig väv upp till en bredd av 350 cm. Vid bredd över 350 cm svetsas PVC-band i Preconstraint # 302 / # 602 på varje sida.
Motordrift: Windy manövreras med motor och styrs via fjärrkontroll.
Tillval: Solskyddande väv **Soltis 86** eller **Soltis 92**.



Sun protection
Schutz vor Sonne



Rain protection
Schutz vor Regen



Wind protection
Windschutz



Fire-resistant fabrics
Schwer entflammbare Stoffe



Stainless steel screws
Schraubenmaterial aus Edelstahl




CE certification
CE-Zertifikat




Cristal Plus



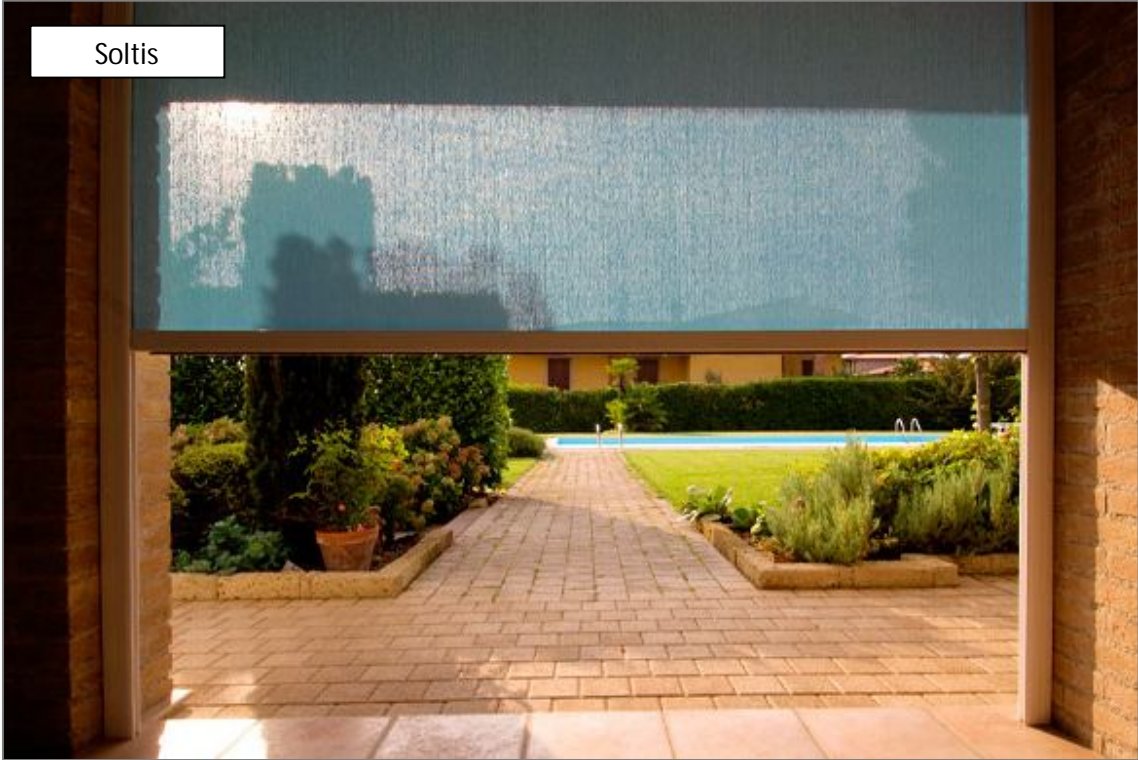


Allmänt:

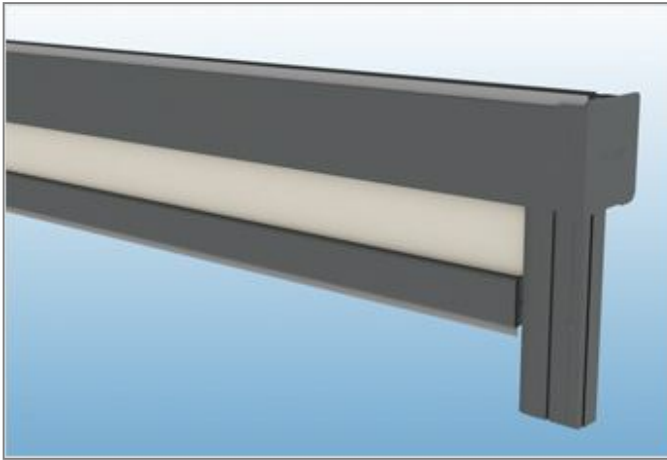

Draught excluder brush for a better adhesion to ceiling and floor.




Inspectable cassette for a direct maintenance of the awning motorization system. The cover can be replaced without dismantle the awning.

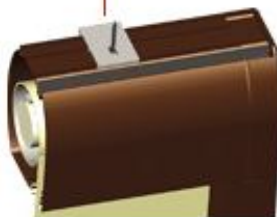

Ceiling fixing through floating brackets and fast hooking.

Telescopic guides for a simple installation even on out-of-square walls.



Front bar with draught excluder brush.